

STYLE 517 BELL JOINT LEAK CLAMPS



MATERIAL SPECIFICATIONS

BELL AND SPIGOT RING: Ductile iron per ASTM A536, Grade 65-45-12.

GASKET: SBR per ASTM D2000 MBA 710, compounded for water and sewer service.

BOLTS: 1/2", mild steel all thread rod, zinc plated.

NUTS: Zinc plated, mild steel.

USE: Romac's 517 Bell Joint Leak Clamps provide a fast, economical means of repairing or preventing leaks on Iron Pipe Size (IPS) PVC, and SDR35 Sewer Pipe.




8" BELL JOINT LEAK CLAMP
DUCTILE IRON POURED IN U.S.A.

NSF61 certified upon request.

NOMINAL PIPE SIZE	O.D. SIZES (inches)	CATALOG NUMBER	BOLTS		APPROX. WEIGHT (lbs.)	LIST PRICE
			NUMBER	DIA. x LENGTH		
4"	4.22	517 - 4.22	4	1/2" x 12"	13 #	\$436.41
	4.50	517 - 4.50	4	1/2" x 12"	13 #	436.41
6"	6.28	517 - 6.28	4	1/2" x 12"	15 #	480.62
	6.63	517 - 6.63	4	1/2" x 12"	15 #	480.62
8"	8.40	517 - 8.40	4	1/2" x 14"	20 #	664.97
	8.63	517 - 8.63	4	1/2" x 14"	20 #	664.97
10"	10.50	517 - 10.50	6	1/2" x 14"	28 #	833.53
	10.75	517 - 10.75	6	1/2" x 14"	28 #	833.53
10" SDR 21 & thicker	10.75 ¹	517 - 10.75 - 2	6 6	1/2" x 14" 1/2" x 14"	28 #	833.53
12"	12.50	517 - 12.50	6	1/2" x 14"	31 #	904.08
	12.75	517 - 12.75	6	1/2" x 14"	31 #	904.08
12" SDR 21 & thicker	12.75 ¹	517 - 12.75 - 2	6	1/2" x 18"	31 #	904.08

¹ NBR gaskets are standard. For Class 200 (SDR21) or thicker wall pipe, longer bolts may be required.

NOTE: BJLC can be provided with double gasket and spigot halves for repairs on in-line couplings. Please provide coupling O.D. and length. All prices on application.

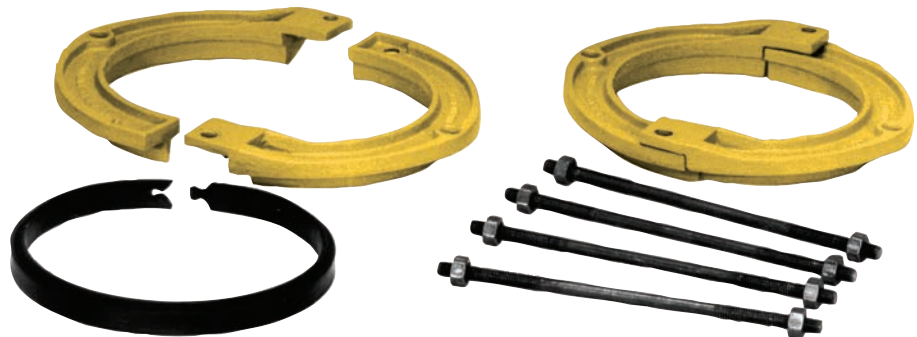

TO ORDER: Specify catalog number. Please provide bell O.D. and length.