



# "BP" ALL STAINLESS STEEL SEWER SADDLE

## MATERIAL SPECIFICATIONS

**SHELL AND LUGS:** Stainless steel per ASTM A240, type 304.


**NECK:** Stainless steel per ASTM A240, type 304; Sch 10 pipe.

**BOLTS:** UNC rolled thread, 304 stainless steel.

**NUTS:** Heavy hex, stainless steel per ASTM A194, type 304. Coated to prevent galling.

**WASHERS:** Flat washers are stainless steel, type 304; spring washers are special "spring" grade of stainless steel and plastic lubricating washers.

**GASKETS:** SBR per ASTM D2000 MAA 610, compounded for water and sewer service. Other compounds available on request.

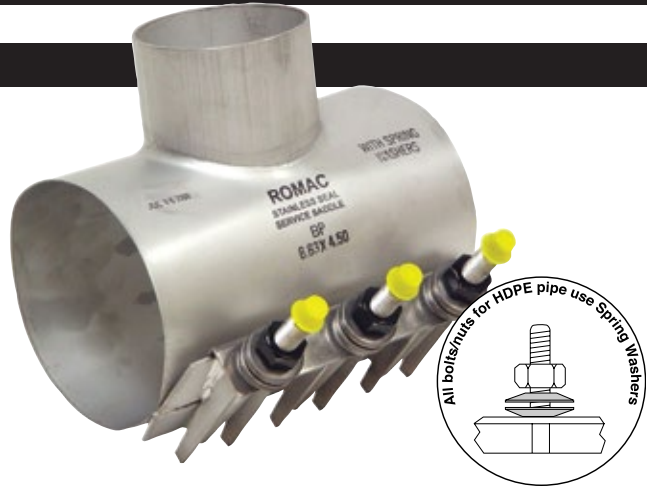


## A ROMAC ORIGINAL

For above-ground HDPE applications, contact Romac's Engineering Department at 1-800-426-9341.

Products and prices listed below are standard Romac sizes. For information on other sizes, contact Romac's Engineering Department.

For important technical information on HDPE pipe, see Page 9-1 & Page 9-2.

NOM. BRANCH SIZE	NOM. PIPE SIZE	OUTSIDE DIAMETER	BRANCH O.D.	CATALOG NUMBER	LIST PRICE	WEIGHT (lbs.)
4"	6"	6.63	4.50	BP-6.63 x 4.50	\$1,087.08	14.5 #
		6.90		BP-6.90 x 4.50		
	8"	8.63	4.50	BP-8.63 x 4.50	1,185.06	14.8 #
		9.05		BP-9.05 x 4.50		
10"	10.75	4.50	BP-10.75 x 4.50	1,299.67	15.3 #	
	11.10		BP-11.10 x 4.50			
12"	12.75	4.50	BP-12.75 x 4.50	1,371.68	15.3 #	
	13.20		BP-13.20 x 4.50			
6"	8"	8.63	6.63	BP-8.63 x 6.63	1,432.37	15.8 #
		9.05		BP-9.05 x 6.63		
	10"	10.75	6.63	BP-10.75 x 6.63	1,546.97	15.8 #
11.10		BP-11.10 x 6.63				
12"	12.75	6.63	BP-12.75 x 6.63	1,618.93	16.3 #	
	13.20		BP-13.20 x 6.63			

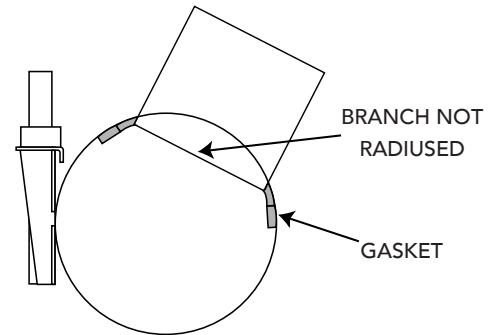

**Standard orientation of bolts to branch**  
Other orientations and variations available on request.

Branch on the inside of the saddle is not radiusued. This part of the branch will intersect the wall of the main, eliminating the potential for the saddle to migrate around or along the pipe. The pipe must be tapped before installing the saddle.

Other sizes are available on request - P.O.A.

**Branch to Neck Connection:** This connection can be made with Romac's Style SS1-H Repair Clamp (or any other standard coupling). See Page 9-3.

The BP Sewer Saddle is not to be used on HDPE pipe with an SDR greater than 32.5.

HDPE Products are No Cancel, No Return Items.

**TO ORDER:** Sewer main O.D. x branch O.D. **Indicate if for above ground application.**

**EXAMPLE:** For a sewer main O.D. of 8.63" and branch O.D. of 4.50", order **BP - 8.63 x 4.50**