



STYLE CL3 (THREE SECTION) WIDEST RANGE 1.20" w/ REMOVABLE LUGS


MATERIAL SPECIFICATIONS

SHELLS: Stainless steel per ASTM A240, type 304.

LUGS: Ductile iron per ASTM A536, Grade 65-45-12. Boat-nose fingers designed for ease of installation. Lugs are removable. E-Coat epoxy coated for improved corrosion resistance.

BOLTS AND NUTS: Trackhead, 5/8" UNC rolled thread, high strength, low alloy, corrosion-resistant steel per AWWA C111. Coated to prevent galling. Stainless steel nuts and bolts available on request.

GASKETS: SBR per ASTM D2000 MAA 610, compounded for water and sewer service. Other compounds available on request.

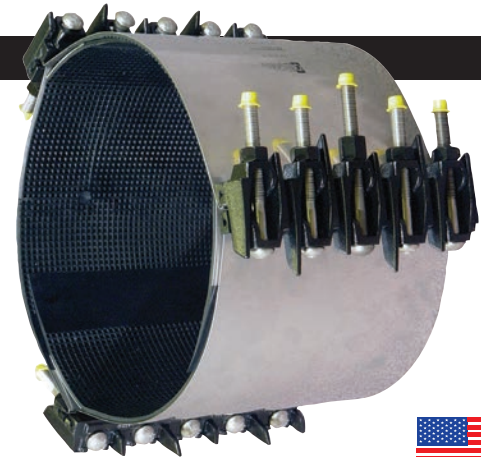

CL3-18.30 x 12" REPAIR CLAMP

NSF61 certified upon request.

MEETS
AWWA C230

O.D. RANGE (inches)	CATALOG NUMBER	LENGTH / WEIGHT						
		7½"	10"	12"	15"	20"	25"	30"
11.04 - 12.24 12.40 - 13.60	CL3-12.24 x length CL3-13.60 x length	\$629.17 30#	\$736.13 39#	\$916.90 48#	\$1,097.57 58#	\$1,454.56 77#	\$1,824.89 96#	\$2,195.30 115#
13.14 - 14.34 13.45 - 14.65	CL3-14.34 x length CL3-14.65 x length	720.98 34#	798.68 45#	992.74 56#	1,186.86 68#	1,579.45 90#	1,972.21 112#	2,364.78 130#
15.30 - 16.50 17.10 - 18.30	CL3-16.50 x length CL3-18.30 x length	1,047.68 36#	1,434.65 48#	1,478.17 60#	1,753.41 72#	2,374.21 96#	3,147.32 120#	3,920.29 144#
18.00 - 19.20 19.50 - 20.70	CL3-19.20 x length CL3-20.70 x length	1,075.24 37#	1,450.35 50#	1,561.24 62#	1,890.71 75#	2,560.19 99#	3,355.61 124#	4,149.35 149#
21.60 - 22.80	CL3-22.80 x length	1,190.23 38#	1,590.84 51#	1,727.39 64#	1,957.26 77#	2,650.20 102#	3,574.09 128#	4,497.45 153#
23.25 - 24.45	CL3-24.45 x length	1,579.90 40#	2,060.50 52#	2,158.34 66#	3,405.52 79#	4,613.58 105#	5,796.51 132#	6,979.38 158#
25.80 - 27.00	CL3-27.00 x length	1,969.43 41#	2,529.82 54#	2,589.16 68#	3,640.86 81#	4,939.19 108#	6,206.77 136#	7,468.94 162#
Add on for 304 stainless steel bolts & nuts		162.32	227.95	291.92	342.09	456.14	569.92	683.96

FOR TAPPED CL3 SEE PAGE 2-14.

NUMBER OF BOLTS PER CLAMP LENGTH							
O.D. RANGE	7½"	10"	12"	15"	20"	25"	30"
All Ranges	9	12	15	18	24	30	36

For higher working pressures, clamp length should equal or exceed diameter of pipe. Some sizes and lengths not listed are available on request. Clamps are not to be used for joining plain end pipe.

TO ORDER: Specify catalog number x length of clamp desired.

EXAMPLE: For a 3-section clamp for pipe with an O.D. between 17.10 and 18.30 and clamp length of 12" order **CL3 - 18.30 x 12"**