


RUBBER GASKET MAT & FILLER FLANGE



MATERIAL SPECIFICATIONS

RUBBER: SBR per ASTM D2000 MAA 610Z (Z = 60 Durometer), compounded for water & sewer service. Other compounds available on request. Gaskets are specially formulated with antioxidant/antiozonant agents to increase shelf life.

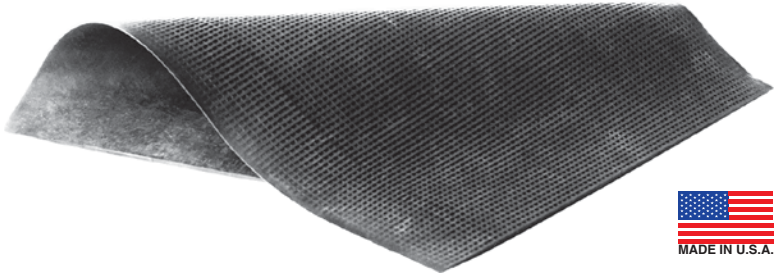

NSF61 certified upon request.

Certified to NSF/ANSI 61 & 372



MAT DIMENSION	APPROX. WEIGHT (lbs.)	THICKNESS (inches)	CATALOG NUMBER	LIST PRICE
6" x 24"	0.8 #	.125"	6 x 24 RM	\$37.95
9" x 24"	1.0 #	.25"	9 x 24 RM	48.65
10" x 24"	2.0 #	.25"	10 x 24 RM	52.28
12" x 24"	2.0 #	.25"	12 x 24 RM	55.48
16" x 24"	3.0 #	.25"	16 x 24 RM	70.48
20" x 24"	4.0 #	.25"	20 x 24 RM	78.01
21" x 24"*	4.0 #	.25"	21 x 24 RM	89.66
23" x 24"	4.0 #	.25"	23 x 24 RM	105.19
27" x 24"	5.0 #	.25"	27 x 24 RM	129.92
34" x 24"	6.0 #	.25"	34 x 24 RM	132.47
37" x 30"	8.0 #	.25"	37 x 30 RM	180.27

* No taper

TO ORDER: Specify catalog number.



FILLER FLANGE

MATERIAL SPECIFICATIONS

FLANGES: ASTM A36 Carbon steel or equal, compatible with AWWA Class D, ANSI Class 125 and 150 bolt circles.

COATING: Romac Shopcoat for corrosion protection in transit. Romacote fusion bonded epoxy, NSF 61 Certified available on request.

USE: Filler flanges are used when flanges with O-rings (RFCA, Alpha FC, FCA501, FCG, Macro FC, DJ400) conflict with mating flanges or if the use of a flat gasket is required.

TO ORDER: Specify catalog number.

NOM. PIPE SIZE	CATALOG #	APPROX. WEIGHT (lbs.)	LIST PRICE	
			SHOPCOAT	EPOXY
3"	3" - Filler Flange	2.5	\$ 186.06	\$ 218.89
4"	4" - Filler Flange	3.2	191.92	225.78
6"	6" - Filler Flange	4.0	212.10	249.15
8"	8" - Filler Flange	5.7	253.90	297.44
10"	10" - Filler Flange	7.1	265.94	312.87
12"	12" - Filler Flange	10.2	285.01	334.30
14"	14" - Filler Flange	12.5	346.56	407.72
16"	16" - Filler Flange	15.0	380.12	447.20
18"	18" - Filler Flange	15.0	778.84	916.28
20"	20" - Filler Flange	17.6	880.78	1,036.21
24"	24" - Filler Flange	22.3	941.47	1,107.61