



STYLE SC REPAIR CLAMPS


MATERIAL SPECIFICATIONS

SHELLS: Stainless steel per ASTM 240, type 304.

LUGS: Ductile iron per ASTM A 536, Grade 65-45-12, coated with Xylan 1212 for enhanced corrosion protection.

BOLTS, WASHERS AND NUTS: UNC rolled thread, mild steel electrogalvanized with dichromate seal.

GASKETS: NBR (Buna-N) gasket compounded for water and gas services.

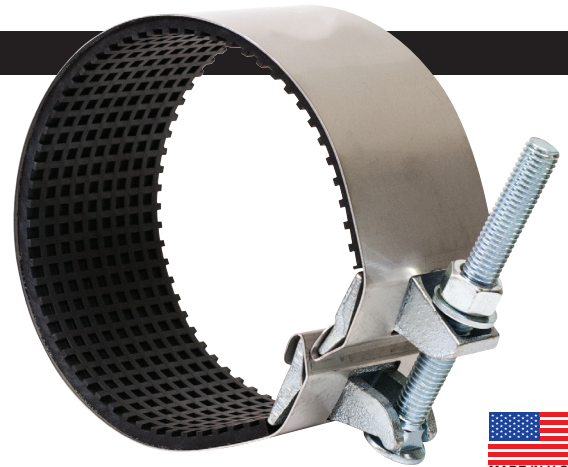

SC 60 X 3" REPAIR CLAMP



NSF61 certified upon request.

MEETS
AWWA C230

REPAIR CLAMPS

NOMINAL PIPE SIZE	CATALOG NUMBER	3"			6"		
		PRICE	QTY/CTN	WT/CTN	PRICE	QTY/CTN	WT/CTN
1/2" Std. Stl.	SC- 8 x length	\$16.17	24	16#	\$29.44	12	16#
3/4" Std. Stl.	SC-12 x length	16.71	24	16#	31.50	12	16#
1" Std. Stl.	SC-13 x length	17.66	24	17#	32.37	12	17#
1 1/4" Std. Stl.	SC-17 x length	18.63	24	17#	34.26	12	17#
1 1/2" Std. Stl.	SC-19 x length	19.52	24	18#	38.32	12	18#
2" Std. Stl.	SC-24 x length	21.36	16	20#	38.78	8	20#
2 1/2" Std. Stl.	SC-29 x length	22.92	16	20#	44.12	8	20#
3" Std. Stl.	SC-35 x length	25.19	6	8#	46.52	4	11#
3 1/2" Std. Stl.	SC-40 x length	26.50	6	10#	49.80	4	13#
4" O.D. Stl.	SC-40 x length	26.50	6	10#	49.80	4	13#
4" Std. Stl.	SC-45 x length	26.50	4	7#	54.09	4	13#
6" O.D. Stl.	SC-60 x length	36.26	14	9#	66.80	2	9#
6" Std. Stl.	SC-66 x length	36.26	4	9#	66.80	2	9#
8" O.D. Stl.	SC-80 x length	43.08	1	4#	79.83	2	10

NUMBER OF BOLTS PER CLAMP LENGTH

OD RANGE	3"	6"
All Ranges	1	2

TO ORDER: Specify catalog number x length of clamp desired.

EXAMPLE: For an "SC" style clamp for 2" Std. Stl. pipe with clamp length of 3", order **SC-24 x 3"**