

SST-H STAINLESS STEEL TAPPING SLEEVE



HDPE FOR HIGH DENSITY POLYETHYLENE PIPE

MATERIAL SPECIFICATIONS

SHELL AND LUGS: Stainless steel per ASTM A240, type 304 and type 304L.


BOLTS: UNC rolled thread, 304 stainless steel.

NUTS: Heavy hex, stainless steel per ASTM A194, type 304.

WASHERS: Plastic lubricating flat washers; spring washers are special "spring" grade stainless steel.

GASKETS: SBR per ASTM D2000 MAA 610, compounded for water and sewer service. Other compounds available on request.

FLANGE: Ductile iron per ASTM 536, Grade 65-45-12; or stainless steel per ASTM A240, type 304. Will accommodate tapping flanges per MSS SP-60.

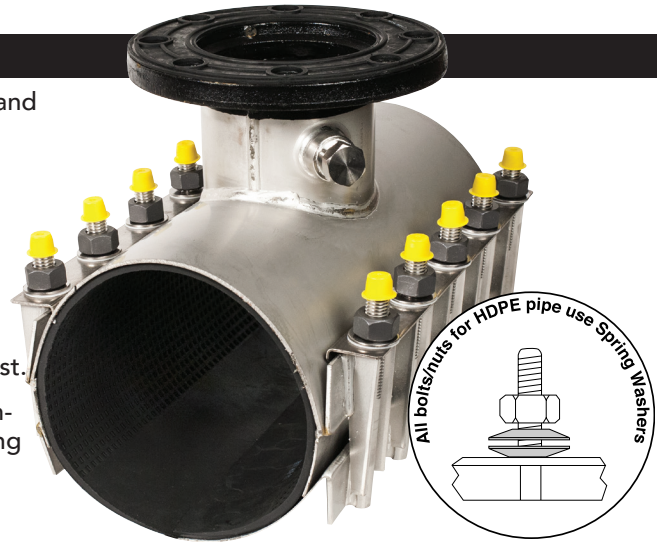

NSF61 certified upon request.

Certified to NSF/ANSI 61 & 372

For above-ground HDPE applications, contact Romac's Engineering Department at 1-800-426-9341.

Products and prices listed below are standard Romac sizes. For information on other sizes, contact Romac's Engineering Department.

For important technical information on HDPE pipe, see Page 9-1 & Page 9-2.

NOMINAL PIPE SIZE	OUTSIDE DIAMETER	CATALOG NUMBER			LIST PRICE EACH		APPROX. WEIGHT (lbs.)
		SLEEVE #	BY	BRANCH SIZE	DUCTILE FLANGE	S.S. FLANGE	
4"	4.50	SST-H - 4.50	x	3" FLG.	NA	\$2,327.87	28#
	4.80	SST-H - 4.80					
6"	6.63	SST-H - 6.63	x	3" FLG.	NA	2,556.29	36#
	6.90	SST-H - 6.90		4" FLG.	1,965.32	2,556.29	38#
8"	8.63	SST-H - 8.63	x	3" FLG.	NA	2,790.41	42#
	9.05	SST-H - 9.05		4" FLG.	2,144.79	2,790.41	44#
				6" FLG.	2,249.90	3,048.91	48#
10"	10.75	SST-H - 10.75	x	3" FLG.	NA	2,988.44	45#
	11.10	SST-H - 11.10		4" FLG.	2,314.63	2,988.44	48#
				6" FLG.	2,452.30	3,204.04	55#
				8" FLG.	3,067.33	4,126.79	70#
12"	12.75	SST-H - 12.75	x	3" FLG.	NA	3,602.08	50#
	13.20	SST-H - 13.20		4" FLG.	2,680.37	3,602.08	52#
				6" FLG.	2,836.61	3,961.55	60#
				8" FLG.	3,462.67	4,836.48	81#
				10" FLG.	5,282.35	7,229.60	96#

NOTES: 1. No size on size taps. Special order size on size tapping sleeves have reduced neck diameters requiring undersized cutter to be used.

2. Other sizes are available on request - POA.



The SST-H Tapping Sleeve is not to be used on HDPE pipe with an SDR greater than 17.



HDPE Products are No Cancel, No Return Items.

TO ORDER: Specify Sleeve Number x Branch Size x Flange Type. Indicate if for above ground application.

EXAMPLE: SST-H - 8.63 x 6" D.I. FLG