


TapMate™ XL-424

4" - 24" Taps




- 4" - 24" Taps.
- Suitable for virtually any waterworks pipeline (Cast Iron, Ductile Iron, Asbestos / Cement, PVC and HDPE).
- 300 psi pressure rating.
- Over 39" of travel.
- Can be used with your existing TapMate and QuikValve equipment.
- Ships in a specially designed crate that serves as an assembly work-station with storage space for tools, pilots and other accessories.
- Manufactured in the U.S.A.

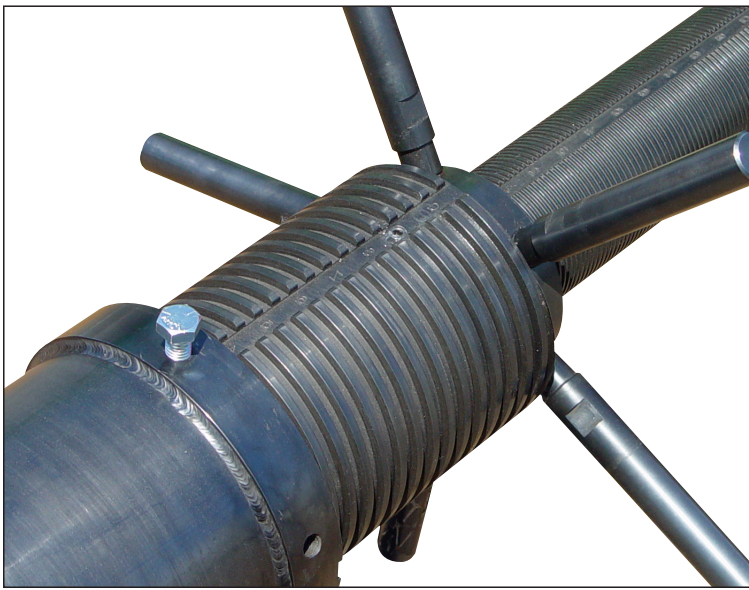

The entire TapMate XL-424 is QPQ coated, protecting the machine from wear and corrosion.

The indicator scale on Lead Tube shows cutter depth and progress of cut. The Thrust Tube is threaded with a #2 Stub Acme Thread for rapid travel through the tapping valve and sleeve.

The TapMate XL-424's manual feed handle gives you total control and feedback during the cut.

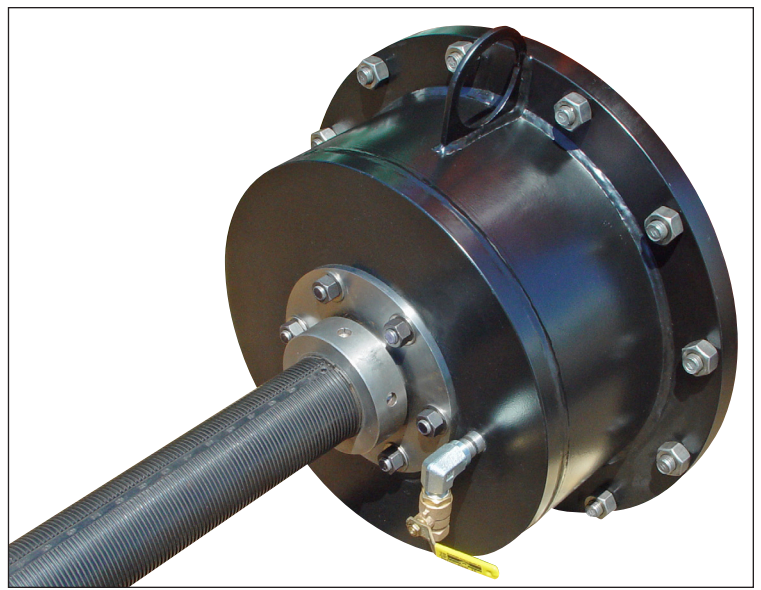


Adapter bells come in 4" - 24" configurations, for wet or dry taps with either flanged or mechanical-joint connections. Special custom adapters are also available.

Large (14" - 24") adapter bells attach with standard 6-bolt flange. The TapMate XL-424 can be used with your existing TapMate and QuikValve equipment.


Convenient Pressure Relief Valve makes Adapter Bell removal a snap.




Durable carbide teeth assure fast, smooth cuts on all types of pipe.

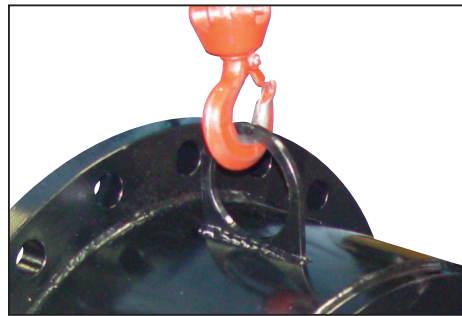

Lifting eyes built into the TapMate XL-424 simplify lifting, positioning and assembly.

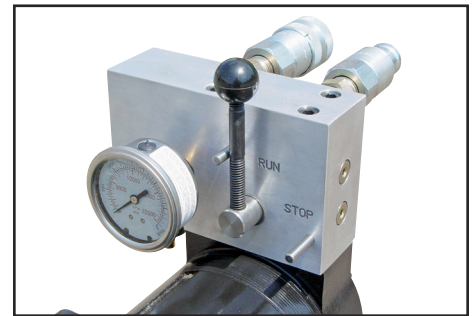

Integrated hydraulic drive head produces up to 15,000 inch lbs. of torque.

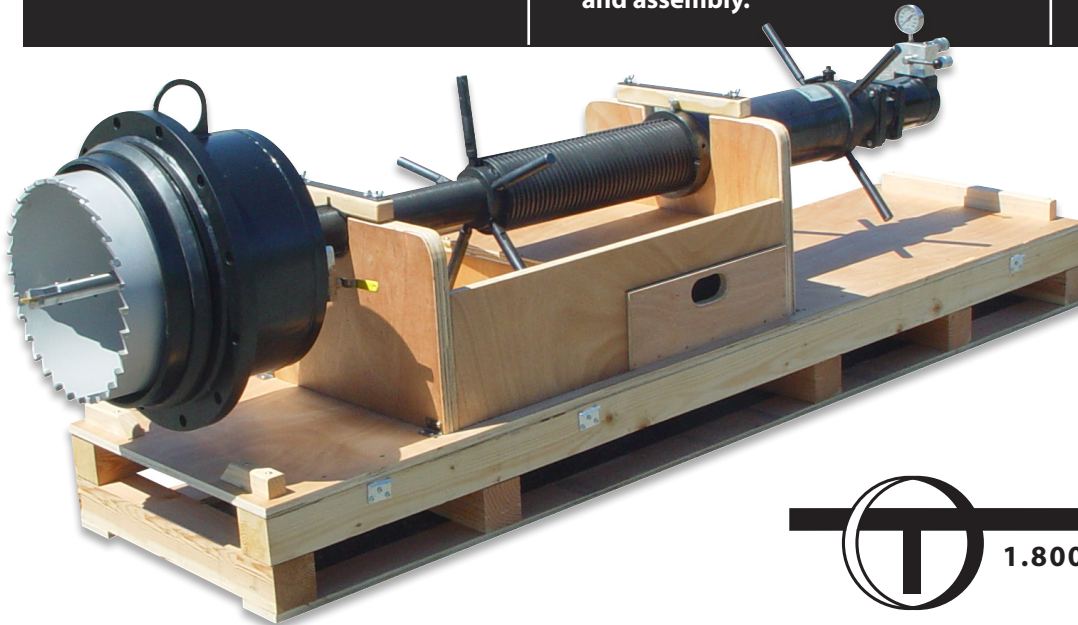

The TapMate XL-424's specially designed shipping crate serves as an assembly work-station and has storage space to secure tools, pilots and other accessories.



Transmate

1.800.426.9341 • www.romac.com