
REVISIONS									
REV	DESCRIPTION	DATE	EDITOR						
9	ADDED DIMENSION FROM END OF PIPE TO FACE OF MJ.	09/19/12	PNN						
10	PRESSURE RATINGS REMOVED, NOTE 2 REMOVED.	11/15/19	DJS						
11	CORRECTED NOTE 4 REFERENCE.	11/11/24	MSL						

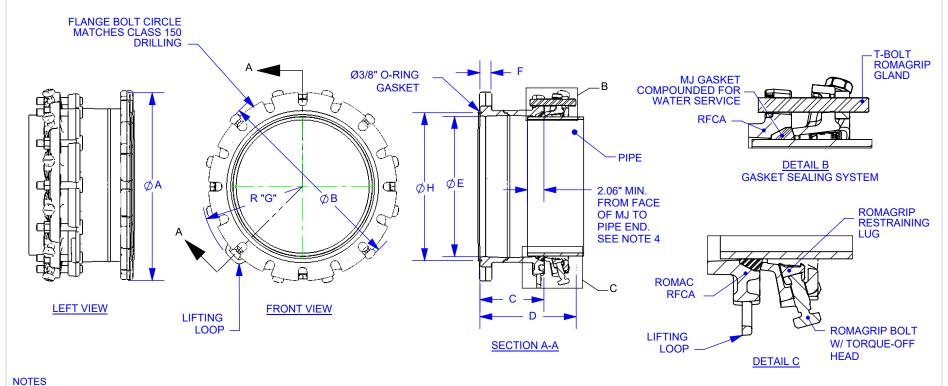

PROPRIETARY NOTICE

- 1. COATING OPTIONS: BODY SHOP COAT OR NSF61 CERTIFIED FUSION BONDED EPOXY, ROMAGRIP - CAN BE SHOP COAT OR ROMABOND POLYESTER.
- 2. DUCTILE IRON AND T-BOLTS PER AWWA C111. STAINLESS STEEL FASTENERS AVAILABLE. WHEN STAINLESS STEEL, THREADED ROD AND TWO NUTS ARE SUPPLIED IN LIEU OF T-BOLTS.
- 3. THE RFCA IS FOR USE ON DUCTILE IRON PIPE. THE RFCA-PVC IS REQUIRED FOR USE ON PVC PIPE.
- 4. THE MINIMUM PIPE INSERTION IS 2.06" PAST FACE OF MJ BODY END (1.0" PAST GASKET), AT BOTH ZERO DEFLECTION AND AT MAX DEFLECTION VALUES (SEE TABLE).

UNLESS OTHERWISE SPECIFIED | SIGNATURES

		FLG	RG										
NOM.	DEFL.	OD	MAX	T BOLTS			DIMENSIONS						WGT,
SIZE	(deg)	Α	В	QTY	SIZE	LGTH	С	D	Е	F	G	H (O-RING)	LBS
14	2.0	21.0	22.0	10	3/4"	4.5	8.00	11.70	15.44	1.38	11.59	16.38	170
16	2.0	23.5	24.1	12	3/4"	4.5	8.00	11.70	17.54	1.44	12.72	18.48	200
18	1.5	25.0	26.3	12	3/4"	4.5	8.00	11.80	19.64	1.45	13.88	20.57	217
20	1.5	27.5	28.4	14	3/4"	4.5	8.00	11.80	21.74	1.47	14.63	22.63	256
24	1.5	32.0	32.6	16	3/4"	5.0	8.00	12.00	25.94	1.50	17.06	26.88	305
ROMAC INDUSTRIES INC													

THIS DRAWING CONTAINS CONFIDENTIAL PROPRIETARY INFORMATION AND IS THE	DIMENSIONS ARE IN INCHES	DRAWN NIELS THOGERSEN III	01/11/02		BOTHELL, WA					
PROPERTY OF ROMAC IND., INC. IT IS TO BE USED ONLY FOR THE PURPOSE FOR WHICH IS WAS SUBMITTED AND SHALL NOT HAVE IT'S INFORMATION DISCLOSED OR REPRODUCED IN WHOLE OR IN PART	TOLERANCES ARE ON: 1 PL DECIMALS ± 2 PL DECIMALS ± 3 PL DECIMALS ± ANGLES ± ° FRACTIONS ±	CHECKED Same	11/14/24		14" - 24" RFCA & RFCA-PVC RESTRAINED FLANGED COUPLING ADAPTER					
FOR ANY PURPOSE WITHOUT PRIOR WRITTEN PERMISSION OF ROMAC IND., INC.		APPROVAL ORGANIZATIONS ENGINEERING			DWG. NO. B1950-A	SIZE A	REV. NO. 11	SCALE NTS	1 OF 1	