DJ400 DISMANTLING JOINT 14" - 72"
WITH TIE RODS

SUBMITTAL INFORMATION

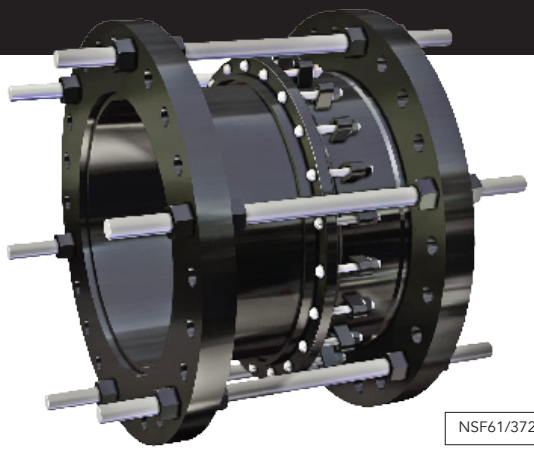

NSF61/372 Certified.

MATERIALS

FLANGED SPOOL
AWWA Class D Steel Ring Flange, compatible with ANSI Class 125 and 150 bolt circles. Pipe is ASTM A36 plate 1% cold expanded to size.

END RING AND BODY
The end ring and body are made from ASTM A36 steel.

GASKETS
Compounded for water and sewer service. Meeting the requirements of ASTM D 2000. Other compounds available on request.

BOLTS AND NUTS
ASTM A588 HSLA bolt material. Stainless Steel, Types 304 or 316 is optional.

TIE RODS
High tensile steel per ASTM A193 grade B7. Stainless steel, type 304 or 316 is optional.

COATINGS
Fusion bonded epoxy, NSF 61 certified.

PRESSURE

When properly installed on a pipe that is within the coupling manufacturer's tolerances, Romac style DJ400 can work at pressures up to the maximum rating of the flange. AWWA Class D flanges are rated for 150 psi in 14" and larger sizes. Higher working pressures can be accommodated. Consult your representative.

ASSEMBLY TOLERANCE

Three inch adjustment see catalog. For more length, contact Romac Engineering.

SIZE

14”-72”. SEE DRAWING FOR DETAIL. Sizes up to Ø170” are available.

STANDARD

The DJ400 meet the specifications set forth in the AWWA Standard C219 coupling spec.

10/23/2025
Document # 20-8-0044

This information is based on the best data available at the date printed above. Please check with Romac for any updates or changes.

ROMAC INDUSTRIES, INC.
www.romac.com
21919 20th Avenue SE • Suite 100 • Bothell, WA 98021
Phone (425) 951-6200 • 1-800-426-9341 • Fax (425) 951-6201