400RG-PVC RESTRAINED COUPLING
FOR AWWA C900 12" & C905 14"-24" PVC PIPE

SUBMITTAL INFORMATION

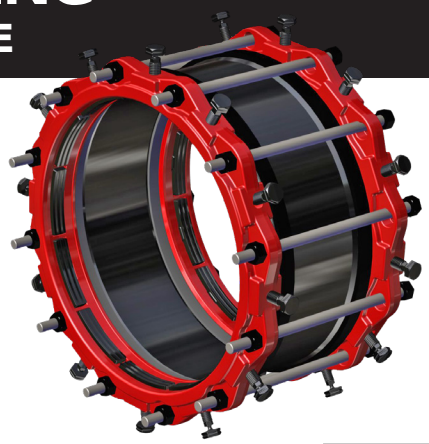

NSF61 Certified.

MATERIALS

BODY
Made from ASTM A 36 steel.

RESTRAINT GLAND
Ductile (nodular) iron, meeting or exceeding ASTM A 536, Grade 65-45-12. Romac's RomaGrip for PVC is used as the glands, see RomaGrip for PVC Submittal for technical information.

GASKETS
MJ, gaskets are made from rubber compounded for water and sewer service in accordance with ASTM D 2000. Other compounds are available for petroleum, chemical, or high temperature service.

BOLTS AND NUTS
ASTM A 193 Grade B7 all-thread-rod. Nuts per ASTM A 194 Grade 2H. Type 304 and 316 Stainless Steel bolt material optional.

COATINGS
Shop coat applied to parts for corrosion protection in transit. Fusion bonded epoxy, RomaGrip Romabond polyester, liquid epoxy and other coatings available on request.

PRESSURE

See FC400RG-PVC Installation Instructions for pressure ratings

SIZES

12 inch through 24 inch.
See FC400RG-PVC Installation Instructions for pipe compatibility

7/16/2025
Document # 30-8-0042

This information is based on the best data available at the date printed above. Please check with Romac for any updates or changes.

ROMAC INDUSTRIES, INC.
www.romac.com
21919 20th Avenue SE • Suite 100 • Bothell, WA 98021
Phone (425) 951-6200 • 1-800-426-9341 • Fax (425) 951-6201