


# 400RG-PVC RESTRAINED COUPLING FOR AWWA C900 12" & C905 14"-24" PVC PIPE

## SUBMITTAL INFORMATION

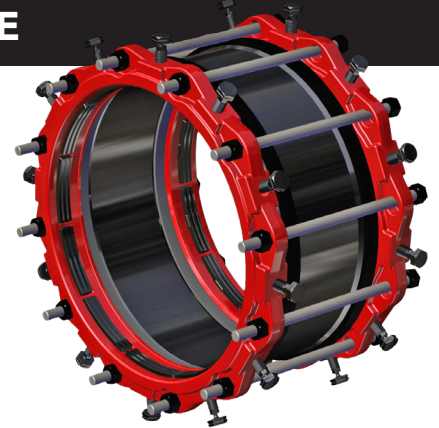

NSF61/372 Certified upon request.

## MATERIALS

### BODY

Made from ASTM A 36 steel.

### RESTRAINT GLAND

Ductile (nodular) iron, meeting or exceeding ASTM A 536, Grade 65-45-12. Romac's RomaGrip for PVC is used as the glands, see RomaGrip for PVC Submittal for technical information.

### GASKETS

MJ, gaskets are made from rubber compounded for water and sewer service in accordance with ASTM D 2000. Other compounds are available for petroleum, chemical, or high temperature service.

### BOLTS AND NUTS

ASTM A 193 Grade B7 all-thread-rod. Nuts per ASTM A 194 Grade 2H. Type 304 and 316 Stainless Steel bolt material optional.

### COATINGS

Shop coat applied to parts for corrosion protection in transit. Fusion bonded epoxy, RomaGrip Romabond polyester, liquid epoxy and other coatings available on request.

## PRESSURE

See FC400RG-PVC Installation Instructions for pressure ratings

## SIZES

12 inch through 24 inch.

See FC400RG-PVC Installation Instructions for pipe compatibility

11/25/2024

Document # 30-8-0042

*This information is based on the best data available at the date printed above. Please check with Romac for any updates or changes.*



www.romac.com  
21919 20th Avenue SE • Suite 100 • Bothell, WA 98021  
Phone (425) 951-6200 • 1-800-426-9341 • Fax (425) 951-6201