


SST & SSTIII DIMENSIONS




A ROMAC ORIGINAL

1980 - Stainless Steel Tapping Sleeve

Corrosion resistant, provides full circumferential seal.

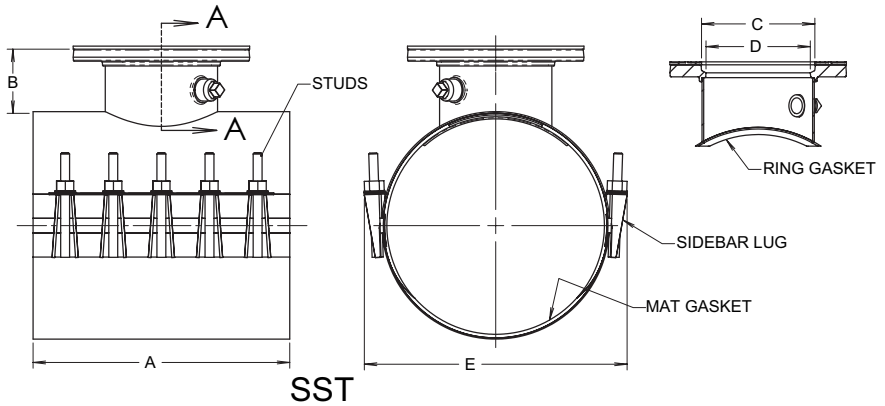

SST

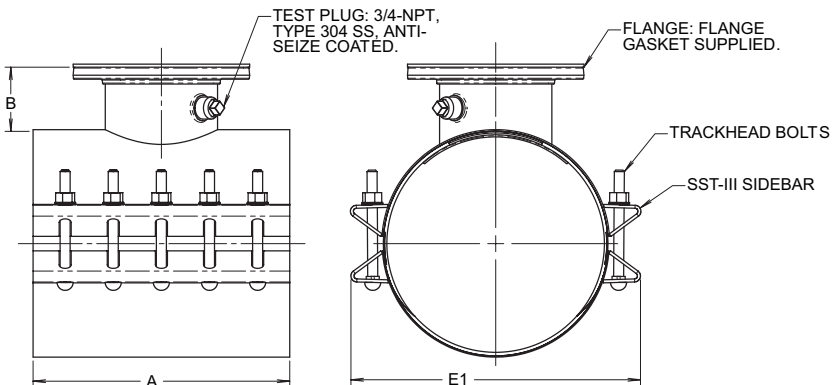

SSTIII

FLANGE SIZE	CATALOG NUMBER	# OF BOLTS	DIMENSIONS					
			A	B	C	D	E	E1
3"	4.60 - 5.30	8	12.0					
	5.60 - 19.30	10	16.0					
	19.70 - 26.50	14	20.0	4.00	4.03	3 1/2	PIPE O.D. + 3.0	PIPE O.D. + 4.6
	27.80 - 32.00 ¹	21	20.0					
4"	4.60 - 5.30	8	12.0					
	5.60 - 19.30	10	16.0					
	19.70 - 26.50	14	20.0	4.00	5.03	4 1/2	PIPE O.D. + 3.0	PIPE O.D. + 4.6
	27.80 - 32.00 ¹	21	20.0					
6"	6.25 - 17.95	10	16.0					
	18.25 - 26.50	14	20.0	4.5	7.03	6 1/2	PIPE O.D. + 3.0	PIPE O.D. + 4.6
	27.80 - 32.00 ¹	21	20.0					
8"	8.30 - 26.50	14	20.0	5	9.03	8 1/2	PIPE O.D. + 3.0	PIPE O.D. + 4.6
	27.80 - 32.00 ¹	21	20.0					
10"	10.73 - 26.50	16	24.0	5.5	11.03	10 1/2	PIPE O.D. + 3.0	PIPE O.D. + 4.6
	27.80 - 32.00 ¹	24	24.0					
12"	12.75 - 16.78	20	30.0	5.75	13.03	12 1/2	PIPE O.D. + 3.0	PIPE O.D. + 4.6
	17.55 - 26.50	20	30.0					
	27.80 - 32.00 ¹	30	30.0					

¹ SSTIII Only

- 6.25 & 6.60 sizes not available with 6" branch.
- 8.30 size not available with 8" branch.

- 10.73 size not available with 10" branch
- 12.75 - 12.90 sizes: 1/2" undersize cutter recommended.