



STYLE CLC COLLAR LEAK CLAMPS

MATERIAL SPECIFICATIONS

SHELLS AND LUGS: Stainless steel per ASTM A240, type 304.

BOLTS: UNC rolled thread, type 304 stainless steel.


NUTS: Stainless steel per ASTM A194, type 304. Coated to prevent galling.

WASHERS: Stainless steel, type 304 and plastic lubricating washers.

GASKETS: SBR per ASTM D2000 MAA 610, compounded for water and sewer service. Other compounds available on request.

NSF61 certified upon request.

MEETS
AWWA C230

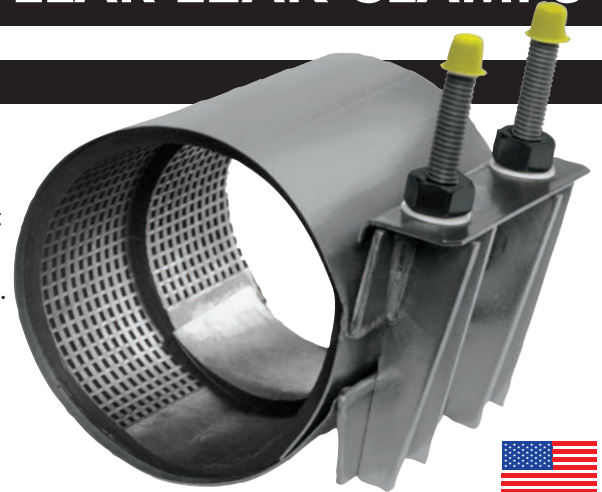

CLC-2.88 COLLAR LEAK CLAMP

For quick, simple repairs of leaking solvent welds on PVC pipe joints

NOM. PIPE SIZE	PIPE O.D. (INCHES)	CATALOG NUMBER	PRICE EACH	APPROX. WEIGHT (lbs.)	OVERALL LENGTH
2"	2.375	CLC-2.38	\$240.78	4 #	6"
2½"	2.875	CLC-2.88	263.99	4 #	6"
3"	3.50	CLC-3.50	281.34	4 #	6"
4"	4.50	CLC-4.50	340.33	5 #	6"

Standard clamp designed for Class 160 and SDR 26 PVC solvent weld bells.

TO ORDER: Specify catalog number. Provide O.D. of bell & spigot when ordering.