



# STYLE SC REPAIR CLAMPS


## MATERIAL SPECIFICATIONS

**SHELLS:** Stainless steel per ASTM A240, type 304.

**LUGS:** Ductile iron per ASTM A536, Grade 65-45-12, coated with Xylan 1212 for enhanced corrosion protection.

**BOLTS, WASHERS AND NUTS:** UNC rolled thread, mild steel electrogalvanized with dichromate seal.

**GASKETS:** NBR (Buna-N) gasket compounded for water and gas services.

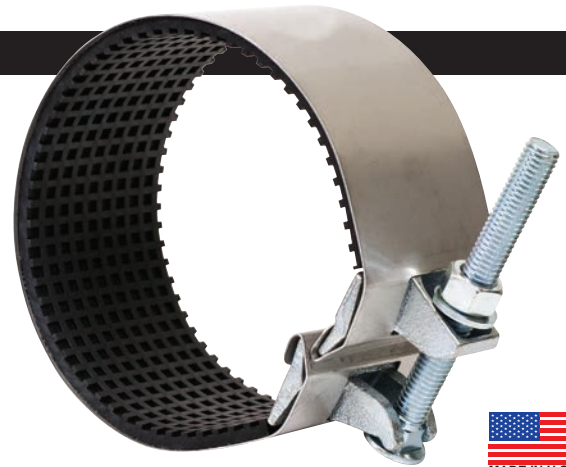

SC 60 x 3" REPAIR CLAMP

REPAIR CLAMPS

NSF61 certified upon request.

NOMINAL PIPE SIZE	CATALOG NUMBER	3"			6"		
		PRICE	QTY/CTN	WT/CTN	PRICE	QTY/CTN	WT/CTN
1/2" Std. Stl.	SC- 8 x length	\$26.92	24	16#	\$49.02	12	16#
3/4" Std. Stl.	SC-12 x length	27.82	24	16#	52.45	12	16#
1" Std. Stl.	SC-13 x length	29.40	24	17#	53.90	12	17#
1 1/4" Std. Stl.	SC-17 x length	31.02	24	17#	57.04	12	17#
1 1/2" Std. Stl.	SC-19 x length	32.50	24	18#	63.80	12	18#
2" Std. Stl.	SC-24 x length	35.56	16	20#	64.57	8	20#
2 1/2" Std. Stl.	SC-29 x length	38.16	16	20#	73.46	8	20#
3" Std. Stl.	SC-35 x length	41.94	6	8#	77.46	4	11#
3 1/2" Std. Stl.	SC-40 x length	44.12	6	10#	82.92	4	13#
4" O.D. Stl.	SC-40 x length	44.12	6	10#	82.92	4	13#
4" Std. Stl.	SC-45 x length	44.12	4	7#	90.06	4	13#
6" O.D. Stl.	SC-60 x length	60.37	4	9#	111.22	2	9#
6" Std. Stl.	SC-66 x length	60.37	4	9#	111.22	2	9#
8" O.D. Stl.	SC-80 x length	71.73	1	4#	132.92	2	10

### NUMBER OF BOLTS PER CLAMP LENGTH

O.D. RANGE	3"	6"
All Ranges	1	2

**TO ORDER:** Specify catalog number x length of clamp desired.

**EXAMPLE:** For an "SC" style clamp for 2" Std. Stl. pipe with clamp length of 3", order **SC-24 x 3"**